


ADJUSTABLE ROOF DRAIN




3000-ADF-134

CAST IRON ROOF DRAIN WITH POLY LOCKING DOME, FLASHING RING INTEGRAL WITH GRAVEL STOP, THREADED ADJUSTABLE EXTENSION WITH O-RING SEALS, SECONDARY CLAMPING COLLAR WITH SEEPAGE OPENINGS, ZINC PLATED HARDWARE AND BOTTOM OUTLET.

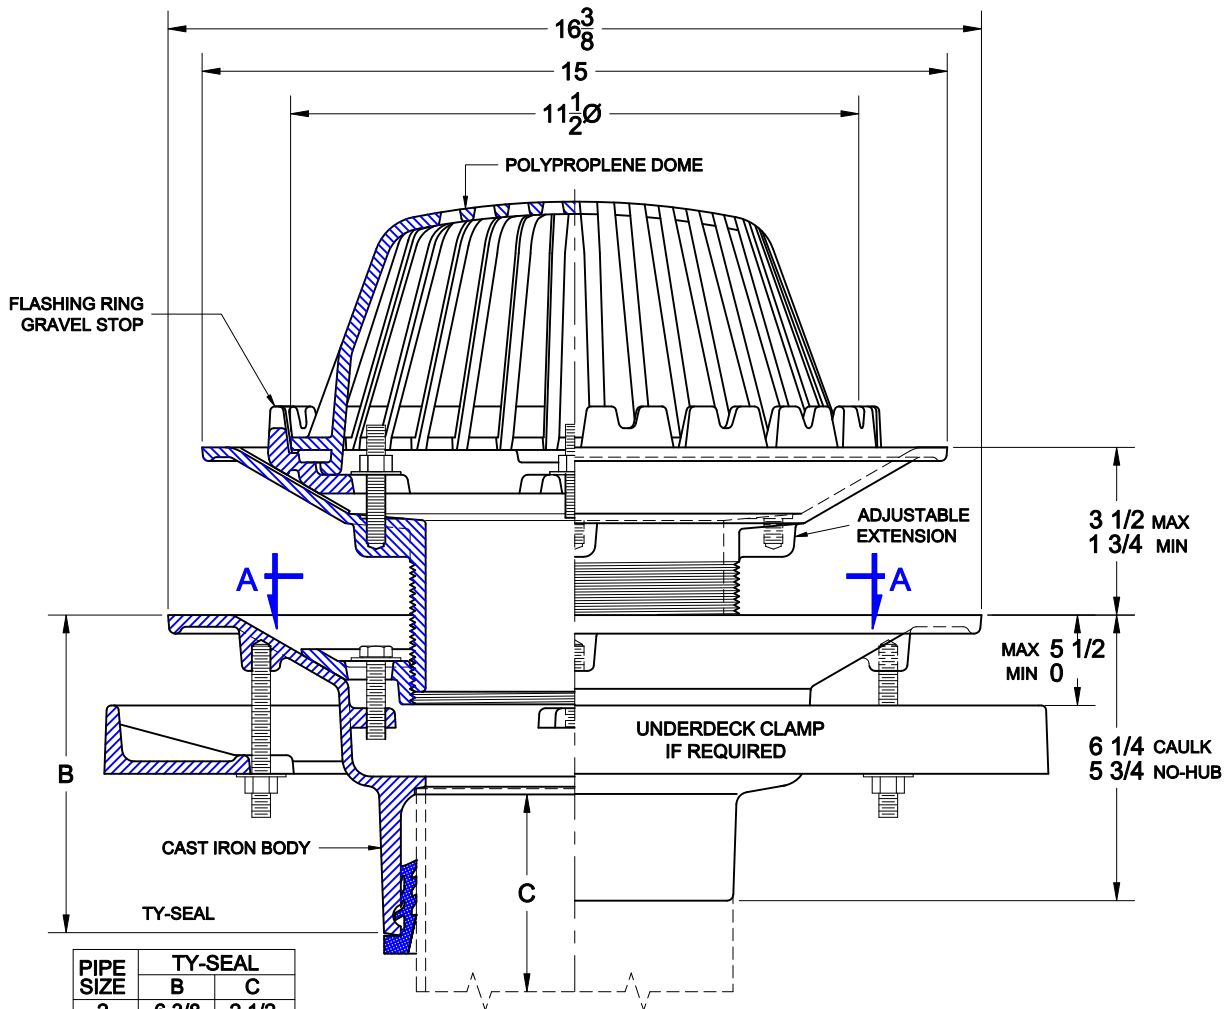

PIPE SIZE	TY-SEAL	
	B	C
2	6 3/8	2 1/2
3	6 5/8	2 3/4
4	6 7/8	3
6	6 3/8	3

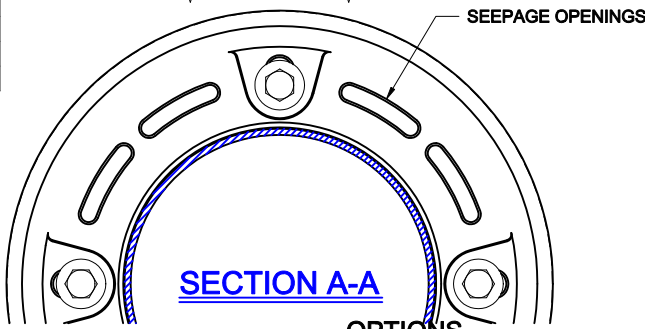

OPTIONS

Cat. No.	Pipe Size	Wt. Lbs.	Suffix	Description
<input type="checkbox"/> 3002-ADF-134	2	84.0	<input type="checkbox"/> 3	BRONZE LOCKING DOME
<input type="checkbox"/> 3003-ADF-134	3	84.5	<input type="checkbox"/> 5	VANDAL PROOF (SECURED DOME)
<input type="checkbox"/> 3004-ADF-134	4	84.5	<input type="checkbox"/> 39	GALVANIZED IRON PARTS
<input type="checkbox"/> 3005-ADF-134	5	85.0	<input type="checkbox"/> 42	CAST IRON LOCKING DOME
<input type="checkbox"/> 3006-ADF-134	6	85.5	<input type="checkbox"/> 46	ALUMINUM LOCKING DOME

OUTLETS

<input type="checkbox"/> NH NO-HUB	<input type="checkbox"/> TY TY-SEAL	<input type="checkbox"/> IC INSIDE CAULK	<input type="checkbox"/> IPS THREADED
------------------------------------	-------------------------------------	--	---------------------------------------

AutoCad.dwg

Approval Date
 Customer Approval
 Job Location
 Job Name
 Dimensional Data (Inches/mm) are Subject to Manufacturers Tolerance and Change Without Notice. Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data