

OIL INTERCEPTOR W/ TANK



Approval Date

Customer Approval


Job Location

Job Name

Dimensional Data (Inches/mm) are Subject to Manufacturers Tolerance and Change Without Notice. Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data


5500

FABRICATED STEEL OIL INTERCEPTOR WITH GRAY EPOXY COATED FINISH INSIDE AND OUTSIDE, FIXED BAFFLES, INTERNAL FLOW CONTROL ORIFICE PLATE, GASKETED NON-SKID COVERS, RECESSED SECURING SCREWS, AIR RELIEF, INTEGRAL STORAGE TANK AND NO-HUB OR THREADED INLET/OUTLET. MATERIALS: BODY - 10 GA COVER - 7 GA TREAD PLATE

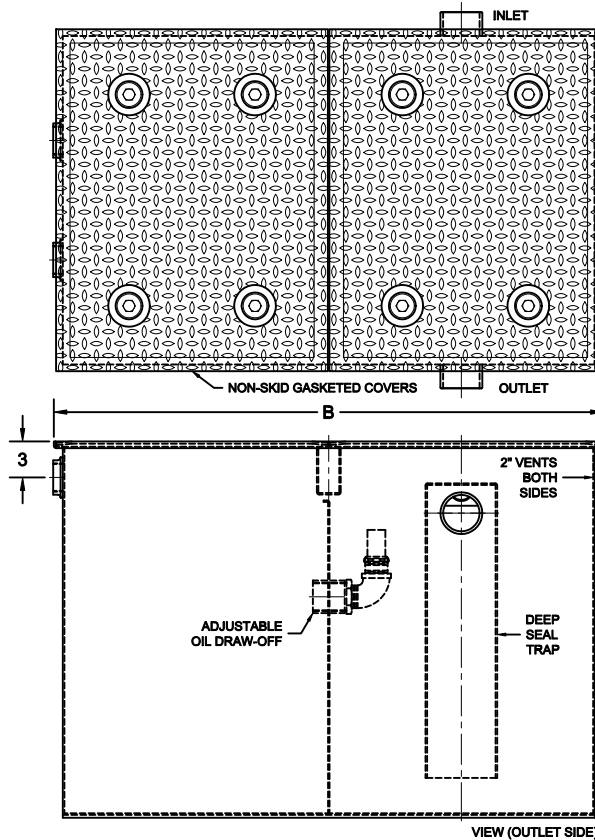

INLET/OUTLET

| Suffix | Description |
|------------------------------|-------------------|
| <input type="checkbox"/> NH | NO-HUB |
| <input type="checkbox"/> IPS | THREADED (FEMALE) |

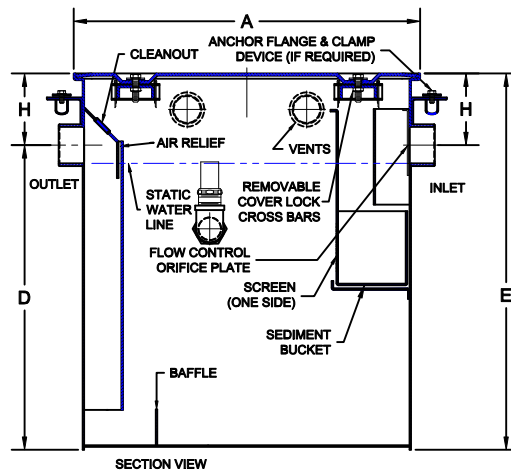

| ✓ | MODEL NUMBER | PIPE SIZE | FLOW RATE (GPM) | INTERCEPTOR CAPACITY | | HOLDING TANK CAPACITY | | A | B | D | E | H | QTY OF LIDS | WT (LBS) |
|---|--------------|-----------|-----------------|----------------------|----------|-----------------------|----------|---------|--------|--------|--------|--------|-------------|----------|
| | | | | (GAL) | (CU.FT.) | (GAL) | (CU.FT.) | | | | | | | |
| | 5500-010 | 2 | 10 | 10.6 | 1.4 | 8.9 | 1.2 | 24 | 26 | 9 | 13 | 4 | 1 | 170 |
| | 5500-015 | 2 | 15 | 15.0 | 2.0 | 12.3 | 1.6 | 26 1/2 | 26 | 11 | 15 | 4 | 1 | 183 |
| | 5500-020 | 3 | 20 | 18.0 | 2.4 | 14.3 | 1.9 | 26 1/2 | 26 | 13 1/2 | 17 1/2 | 4 | 1 | 197 |
| | 5500-025 | 3 | 25 | 63.1 | 8.4 | 65.0 | 8.7 | 29 | 46 | 25 1/2 | 32 | 4 1/2 | 2 | 420 |
| | 5500-035 | 3 | 35 | 100.2 | 13.4 | 61.0 | 8.2 | 37 | 44 1/2 | 26 | 32 | 5 | 4 | 545 |
| | 5500-050 | 3 | 50 | 163.0 | 21.9 | 117.0 | 15.5 | 43 | 65 1/2 | 26 | 34 | 6 | 4 | 780 |
| | 5500-075 | 4 | 75 | 202.0 | 27.0 | 121.7 | 16.3 | 49 | 65 | 26 1/2 | 36 | 9 1/2 | 4 | 890 |
| | 5500-100 | 4 | 100 | 303.0 | 40.5 | 237.7 | 31.8 | 58 | 90 | 26 1/2 | 36 | 9 1/2 | 4 | 1500 |
| | 5500-125 | 4 | 125 | 344.0 | 46.0 | 269.0 | 36.0 | 62 | 90 | 28 | 36 | 12 | 9 | 1615 |
| | 5500-150 | 4 | 150 | 357.0 | 47.7 | 232.7 | 31.1 | 66 | 76 | 30 | 38 | 14 | 9 | 1740 |
| | 5500-200 | 4 | 200 | 453.0 | 60.5 | 347.0 | 46.4 | 73 1/4 | 90 | 30 1/2 | 42 | 17 1/2 | 9 | 2340 |
| | 5500-250 | 4 | 250 | 589.0 | 78.7 | 348.0 | 46.7 | 73 1/4 | 90 | 35 1/2 | 50 | 15 1/2 | 9 | 2400 |
| | 5500-300 | 6 | 300 | 815.0 | 108.9 | 345.3 | 46.2 | 94 7/8 | 86 | 36 1/2 | 52 | 15 1/2 | 9 | 2860 |
| | 5500-350 | 6 | 350 | 1066.0 | 142.5 | 568.5 | 76.0 | 100 7/8 | 94 | 43 1/2 | 52 | 16 1/2 | 9 | 3300 |
| | 5500-400 | 6 | 400 | 1109.0 | 148.3 | 562.3 | 75.2 | 107 7/8 | 91 | 43 | 54 | 17 | 9 | 3420 |
| | 5500-450 | 6 | 450 | 1113.0 | 148.8 | 566.2 | 75.7 | 118 7/8 | 83 | 43 | 54 | 17 | 9 | 3540 |
| | 5500-500 | 6 | 500 | 1240.0 | 165.8 | 559.1 | 74.8 | 118 7/8 | 83 | 43 | 58 | 20 | 9 | 3760 |

OPTIONS

| Suffix | Description |
|-----------------------------|-----------------------------|
| <input type="checkbox"/> SS | ALL STAINLESS STEEL |
| <input type="checkbox"/> XT | EXTENSION (SPECIFY 'H') |
| <input type="checkbox"/> HD | REINFORCED HEAVY DUTY COVER |
| <input type="checkbox"/> T | COVER RECESSED FOR TILE |
| <input type="checkbox"/> U | COVER RECESSED FOR TERRAZZO |
| <input type="checkbox"/> SA | SACRIFICIAL ANODES |

OPTIONS

| Suffix | Description |
|-----------------------------|------------------------------|
| <input type="checkbox"/> AC | ALUMINUM COVERS |
| <input type="checkbox"/> DW | DOUBLE WALL CONSTRUCTION |
| <input type="checkbox"/> 24 | ANCHOR FLANGE |
| <input type="checkbox"/> 26 | ANCHOR FLANGE / CLAMP DEVICE |
| <input type="checkbox"/> AP | HIGH LEVEL PROBE W/ ALARM |

AutoCad.dwg

9-30-13

WADE • 11910 CR 492 • Tyler, TX 75706 • PH (903)882-5511 • FAX (888)879-9233
 WADE Canada • 6200 Rue Principale • Ste-Croix Quebec GOS 2H0 • PH (800)463-3480 Ext. 2227 • FAX (888)879-9233

A-5584