

SV HUB & GASKETS



Approval
Date


Customer
Approval

Job
Location

Job
Name

Dimensional Data (Inches/mm) are Subject to Manufacturers Tolerance and Change Without Notice. Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data

TYLER & WADE SV HUBS AND GASKETS
TOLERANCES FOR ACCEPTABLE JOINTS

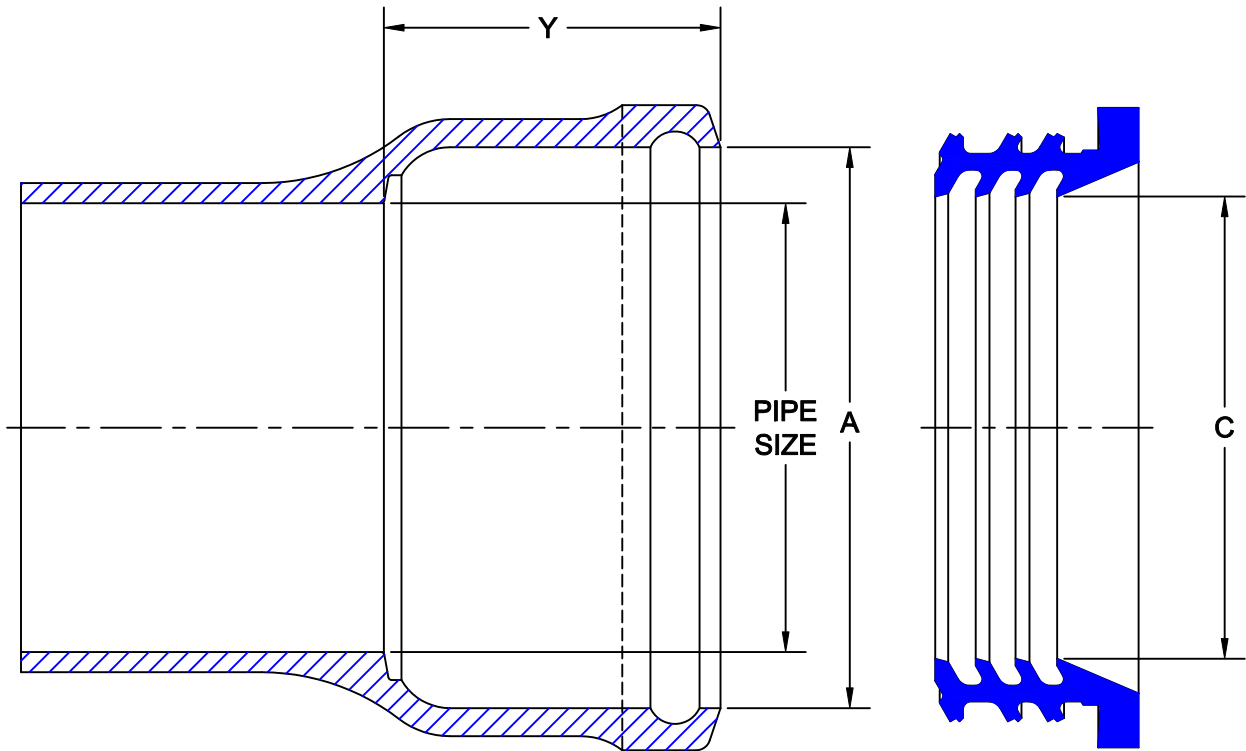

UPC	DESCRIPTION	PIPE SIZE	A		C (PIPE O.D.)		Y (HUB DEPTH)
			MIN	MAX	MIN	MAX	
004950	GASKET,EZ-TIGHT	2"	2.88	3.00	2.21	2.39	2.50
004967	GASKET,EZ-TIGHT	3"	3.88	4.03	3.21	3.50	2.75
004974	GASKET,EZ-TIGHT	4"	4.88	5.03	4.21	4.39	3.00
396420	GASKET,PUSH-ON	4"	4.88	5.03	4.21	4.50	3.00
004981	GASKET,EZ-TIGHT	5"	5.88	6.03	5.21	5.39	3.00
004998	GASKET,EZ-TIGHT	6"	6.88	7.03	6.21	6.39	3.00
420798	GASKET,PUSH-ON,PVC	6"	6.88	7.03	6.50	6.63	3.00