

Approval Date

Customer Approval


Job Location

Job Name

Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data. Dimensional Data (Inches/mm) are Subject to Manufacturers Tolerance and Change Without Notice.

5-100

WADE WATER HAMMER HARRESTERS EMPLOY A PERMANENTLY SEALED AIR CHAMBER TO ABSORB ENERGY FROM COMMON WATER HAMMER. UNITS SHOULD BE SIZED IN ACCORDANCE WITH PDI STANDARD WH-201.

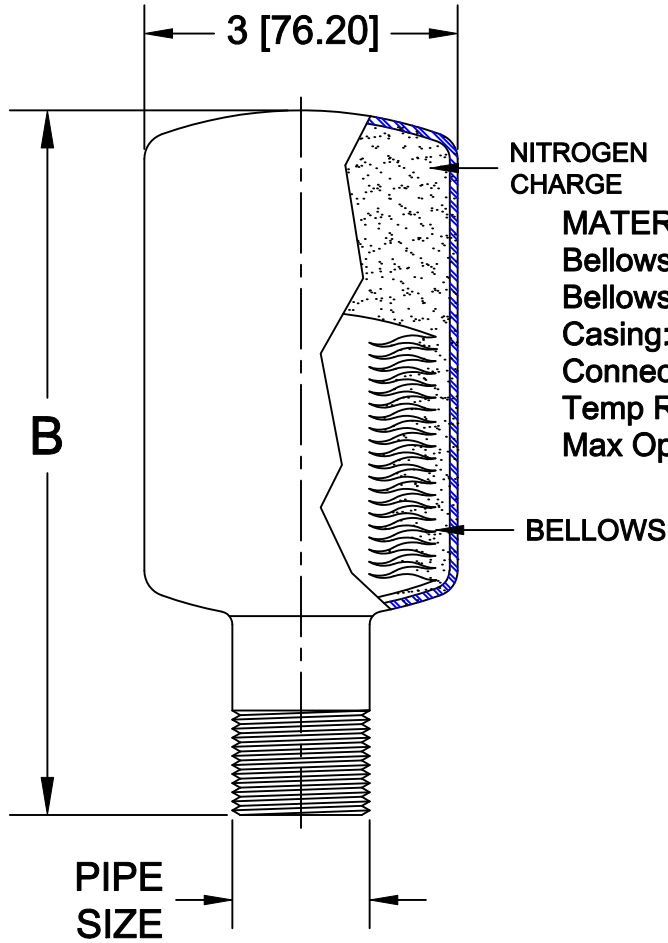

MATERIAL SPECIFICATIONS:

- Bellows Content: Nitrogen
- Bellows: Stainless Steel
- Casing: Stainless Steel
- Connection: Male NPT
- Temp Range: -100° F to 300° F
- Max Operation Pressure: 125 PSI

CATALOG NUMBER	P.D.I. SYMBOL	FIXTURE UNIT RATING	PIPE SIZE	B
5	A	1-11	3/4" (19)	2 1/8 (54)
10	B	12-32	1" (25)	4 (102)
20	C	33-60	1" (25)	4 3/8 (111)
50	D	61-113	1" (25)	5 1/2 (140)
75	E	114-154	1" (25)	6 15/16 (176)
100	F	155-330	1" (25)	6 15/16 (176)

Wade Shokstops are certified under Plumbing & Drainage Institute Standard WH-201 and American Society of Sanitary Engineers Standard ASSE-1010. Certifications are available upon request.